




T120

LOOP POWERED TRANSMITTER FOR PT100 AND NI100 PROBES (IN HEAD MOUNTING)

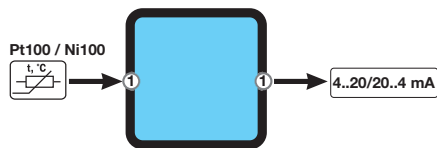

T120 is a converter for Thermoresistance PT100/Ni100 with 2,3,4 wires and convert it into 4..20mA loop powered signal. It's completely configurable through PC software. T120 is suitable for in-head mounting (Pt100). The output signal is not isolated from the input one.

TECHNICAL SPECIFICATIONS

General Data

Power supply	5..30 Vdc
Power consumption	20mA
Isolation	-
Power transducers	-
Accuracy	0,1%
Response time	<620 ms
Settings	Easy_LP (PC software)
Mounting	In-Head mounting (PT100) Available adapter for DIN RAIL guide
Protection Degree	IP20
Operating Temperature	-40..+85 °C
Dimension	Ø 43,7 x 20 mm

Input

Channel Numbers	1
RTD	Pt100 Standard: EN 60751/A2 (ITS-90) Range: -200..+650°C Min span: 20°C Sensors with 2, 3, 4 wires Ni100 Range: -60..+650°C Min span: 20°C Sensors with 2, 3, 4 wires


Output

Channel Numbers	1
Current	CURRENT (mA) 4..20, 20..4 mA (2 wire)

Standard

Approval	CE
Norms	EN 50081-2; EN 55011; EN 50082-2; EN 61000-2-2/4; EN 50140/141; EN 61010-1

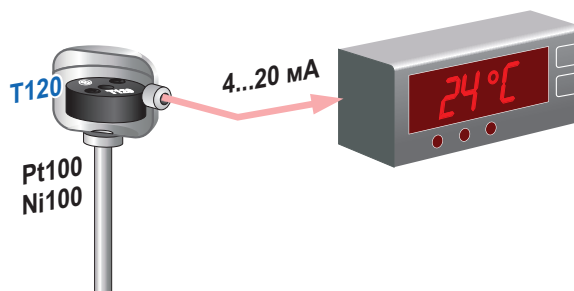


APPLICATION NOTE







ORDER CODES

Code	Description
T120	Loop powered transmitter for Pt100 and Ni100 probes (in head mounting), Power supply 5..30 Vdc

ACCESSORIES & SOFTWARE

		
EASY USB USB ↔ UART TTL CONVERTER	EASY_LP Programming software	PM002780 FLEX DIN

SIMILAR PRODUCTS

			
K120RTD Pt100, Ni100 loop powered converter	T121 Isolated loop powered temperature transmitter (in head mounting)	Z109PT2 RTD to DC current/voltage isolator/converter	K109PT PT100 to DC current/voltage isolator/converter