



INMR

**FLOAT
LEVEL
SWITCH**

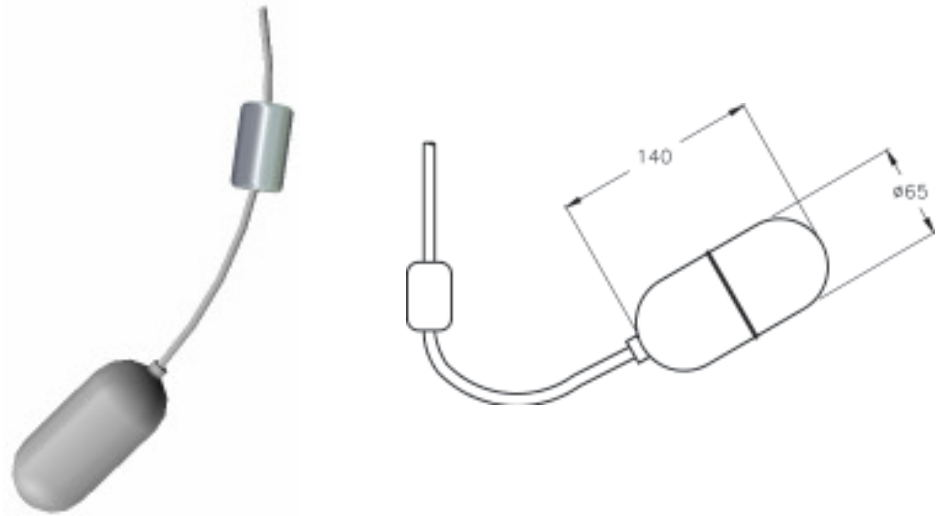

Funtion	Control of maximum and/or minimum level when filling or emptying.
Application	Clean and residuals waters without crusts growing.
Attachment	By the cable.
Float material	Antishock polystirene.
Counterweight material	Inox AISI303 (1.4305)
Cable	Butylic cable, 3 x 1 mm ² (high flexibility).
Cable lenght	2 m (Opcional 5-10-15-20-25-30 m).
Contact type	Micro-switch 1 inversor.
Maximum voltage	250 VAC
Maximum current	15 A 250 VAC
Pressure	4 Kg/cm ²
Density	0,8 g/cm ³
Operation temperature	+60 °C
Dimensions	Ø65 x 140 mm.
Weight	176 gr approx. (without cable) Counterweight: 345 gr
Protection	IP68

Installation examples

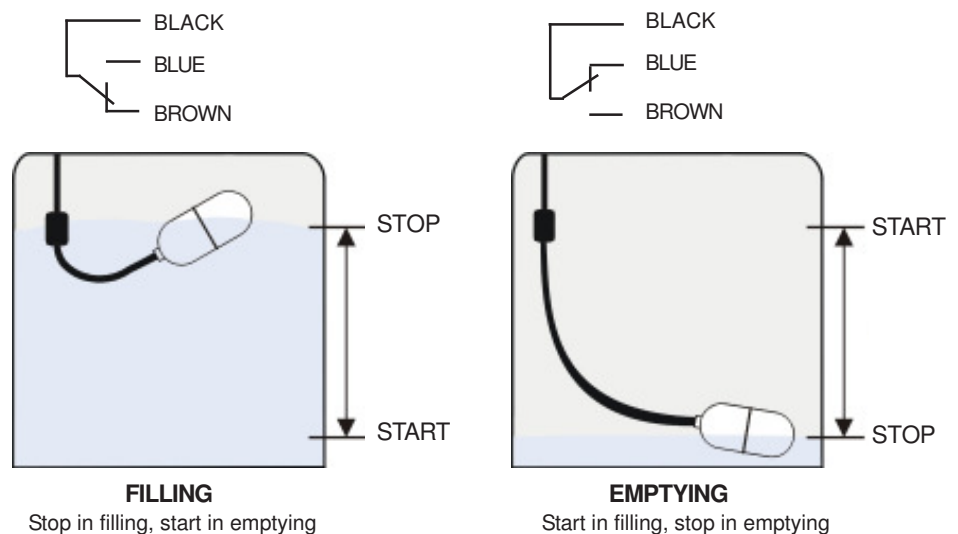

Microlectra bv.
Augustapolder 12.
2992 SR Barendrecht
The Netherlands
www.microlectra.com
info@microlectra.nl