


**NB**



**CONDUCTIVE ELECTRODES**

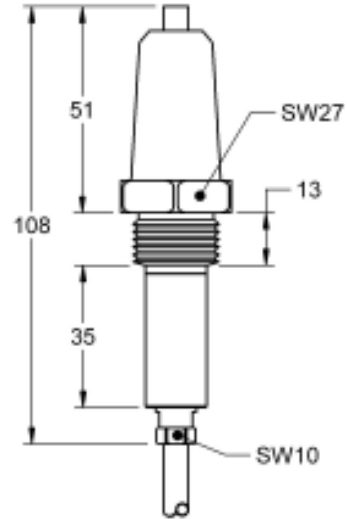

Description	For tanks with pressure and temperature.
Body material	SS AISI316 (1.4401)
Electrode	SS AISI316 (1.4401). Ø6 mm.
Electrode length (mm)	1000, 2000 Only supplied on request.
Process connection	Thread 1/2" G
Electrical connection	By terminal
Maximum temperature	+220 °C.
Pressure	20 bar
Usable with	Level relays for conductive liquids: families of relays PN, DN and SN (see next page).
Warning	DISIBEINT ELECTRONIC SL is not responsible of the electric behavior of these electrodes when using control relays belonging another manufacturers.



Accessories

**PS-3**





































Function: Overvoltage protector for the probes line  
 Reference - Material - Colour: PS3 - Noryl (housing box) - Light grey

Rev. 03/00 · 24/04/12 · DISIBEINT reserves the right to modify the specifications stated in this document without previous notice.

## LEVEL RELAY FOR CONDUCTIVE LIQUIDS

- Electrode holder compact and exclusive use electrodes in conductive liquids.
- Used level control points independent or combined among themselves in low-lying deposits.
- They need to connect to a level relay for conductive liquids
- The number of electrodes is determined by the chosen relay function

				
	<b>PNSA</b>	<b>DNSA</b>	<b>SNSA</b>	
	<ul style="list-style-type: none"> <li>· <b>Control of level maximum and/or minimum</b></li> <li>· General application</li> <li>· Sensitivity: 10..100Kohms</li> <li>· Voltage/Current (probes): 24 VAC/4 mA</li> </ul>			
	<b>PNFA</b>	<b>DNFA</b>		
	<ul style="list-style-type: none"> <li>· <b>Combined control of phase failure and maximum and/or minimum level</b></li> <li>· Sensitivity: 10..100Kohms</li> <li>· Voltage/Current (probes): 24 VAC/4 mA</li> </ul>			
	<b>PNCA</b> <b>PNCB</b>	<b>DNCA</b> <b>DNCB</b>		 
	<ul style="list-style-type: none"> <li>· <b>Supply voltage DC or AC</b></li> <li>· <b>Doble contact of relay</b></li> <li>· Control of maximum and/or minimum level</li> <li>· Sensitivity: 8..45 Kohms</li> <li>· Voltage/Current (probes): 6,2 VAC/3,2 mA</li> </ul>			
	<b>PNEA</b>	<b>DNEA</b>		
	<ul style="list-style-type: none"> <li>· <b>For high resistivity liquids: distilled water, demineralized...</b></li> <li>· Maximum and/or minimum level</li> <li>· Two ranges of sensitivity: 10..100 Kohms / 200 Kohms..4,7 Mohms</li> <li>· Voltage/Current (probes): 24VAC/4mA</li> </ul>			
	<b>PNDA</b>	<b>DNDA</b>		
	<ul style="list-style-type: none"> <li>· <b>Automatic control of well and tank</b></li> <li>· Sensitivity: 10..100 Kohms</li> <li>· Voltage/Current (probes): 24 VAC/4mA</li> </ul>			
	<b>PNGA</b>	<b>DNGA</b>		 
	<ul style="list-style-type: none"> <li>· <b>Double level control</b></li> <li>· Two controls of independents levels</li> <li>· <b>Contacts NO</b></li> <li>· Maximum and/or minimum level</li> <li>· Sensitivity: 10..100 Kohms</li> <li>· Voltage/Current (probes): 24 VAC/4 mA</li> </ul>			
	<b>PNHA</b>	<b>DNHA</b>		 
	<ul style="list-style-type: none"> <li>· <b>Double level control</b></li> <li>· Two controls of independents levels</li> <li>· <b>Contacts NC</b></li> <li>· Maximum and/or minimum level</li> <li>· Sensitivity: 10..100 Kohms</li> <li>· Voltage/Current (probes): 24 VAC/4 mA</li> </ul>			
			<b>SNDA</b>	 
	<ul style="list-style-type: none"> <li>· <b>Two independent level controls</b></li> <li>· Contacts NO/NC</li> <li>· Maximum and/or minimum level</li> <li>· Sensitivity: 10..100 Kohms</li> <li>· Voltage/Current (probes): 24 VAC/4 mA</li> </ul>			
			<b>SNZA</b>	  
	<ul style="list-style-type: none"> <li>· <b>Control of 3 independent levels, from the same tank or not</b></li> <li>· Many application possibilities</li> <li>· Independent settings for each relay</li> <li>· Max-Min function or by level point</li> <li>· Timing to detection level: 0..10s</li> <li>· Sensitivity: 1..100Kohms</li> <li>· Voltage/Current (probes): 5 VAC/4 mA</li> </ul>			
			<b>MNZA</b>	   
	<ul style="list-style-type: none"> <li>· <b>Three independent level controls</b></li> <li>· Contacts NO/NC</li> <li>· Maximum and/or minimum level</li> <li>· Without box. For direct mounting on rail DIN</li> <li>· Sensitivity: 10..100 Kohms</li> <li>· Voltage/Current (probes): 24 VAC/4 mA</li> </ul>			