





MODBUS RTU

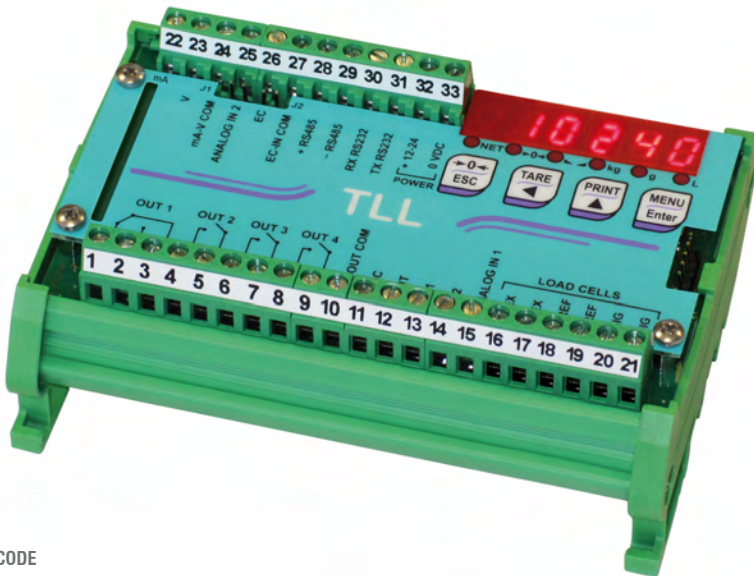

SYNCHRONOUS TRANSMISSION

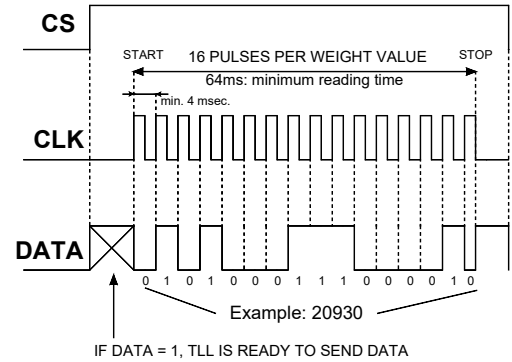

CODE

TLL

TLLANA (analog output)

DESCRIPTION

- Weight transmitter suitable for back panel mounting on Omega/DIN rail or junction box (on request).
- Dimensions: 123x92x50 mm.
- 6-digit semi-alphanumeric red LED display (8 mm height).
- 6 signalling LED.
- 4-key keyboard.

INPUTS/OUTPUTS AND COMMUNICATION

- RS485/RS232 serial ports for communication via protocols ModBus RTU, ASCII Laumas or continuous one way transmission.
- Current or voltage 16 bit optoisolated analog output (TLLANA).
- 4 relay outputs controlled by the setpoint values or via protocols (2 outputs if synchronous serial transmission is present).
- 2 optoisolated PNP digital inputs: status reading via serial communication protocols (1 input if synchronous serial transmission is present).
- 1 load cell dedicated input.

MAIN FUNCTIONS

- Connections to:
 - PLC via synchronous serial communication;
 - PLC via analog output (TLLANA);
 - PC/PLC via RS485/RS232 (up to 99 instruments with line repeaters, up to 32 without line repeaters);
 - remote display via RS485/RS232;
 - up to 8 load cells in parallel by junction box.
- Digital filter to reduce the effects of weight oscillation.
- Theoretical calibration (via keyboard) and real calibration (with sample weights and the possibility of weight linearization up to 5 points).
- Tare weight zero setting.
- Automatic zero setting at power-on.
- Gross weight zero tracking.
- Semi-automatic tare (net/gross weight) and preset tare.
- Semi-automatic zero.
- Displaying of the maximum weight value reached (peak).
- Direct connection between RS485 and RS232 without converter.
- Hysteresis and setpoint value setting.


CERTIFICATIONS

UL US UL Recognized component - Complies with United States and Canada standards




EAC Complies with the Eurasian Customs Union standards

UK CA Equivalent of the CE marking for the United Kingdom

TECHNICAL FEATURES

| | | |
|---|--|-------------------------------|
| Power supply and consumption | 12÷24 VDC ±10%; 5 W | |
| Number of load cells • Load cells supply | up to 8 (350 Ω) - 4/6 wires • 5 VDC/120 mA | |
| Linearity • Analog output linearity | <0.01% full scale • <0.01% full scale | |
| Thermal drift • Analog output thermal drift | <0.0005% full scale/°C • <0.003% full scale/°C | |
| A/D Converter | 24 bit (16000000 points) - 80 Hz | |
| Divisions (with measurement range ±10 mV and sensitivity 2 mV/V) | ±999999 • 0,01 μV/d | |
| Measurement range | ±19.5 mV | |
| Usable load cells sensitivity | ±3 mV/V | |
| Conversions per second | 80/s | |
| Display range | ±999999 | |
| Decimals • Display increments | 0÷4 • x1 x2 x5 x10 x20 x50 x100 | |
| Digital filter • Readings per second | 10 levels • 5÷80 Hz | |
| Relay outputs | 4/2 - max 115 VAC/150mA | |
| Optoisolated digital inputs | 2/1 - 5÷24 VDC PNP | |
| Serial ports | synchronous transmission, RS485, RS232 | |
| Baud rate | 2400, 4800, 9600, 19200, 38400, 115200 (bit/s) | |
| Optoisolated analog output | 16 bit = 65535 divisions. 0÷20 mA; 4÷20 mA (up to 300 Ω) 0÷10 V; 0÷5 V; ±10 V; ±5 V (min 10 kΩ) | |
| Humidity (condensate free) | 85% | |
| Storage temperature | -30 °C +80 °C | |
| Working temperature | -20 °C +60 °C | |
|  | Relay outputs | 4 - max 30 VAC, 60 VDC/150 mA |
| | Working temperature | -20 °C +60 °C |
| | Equipment to be powered by 12-24 VDC LPS or Class 2 power source | |

OPTIONS ON REQUEST

| | DESCRIPTION | CODE |
|---|--|---|
| | IP67 polycarbonate box; dimensions: 170x140x95 mm (four fixing holes Ø4 mm; centre distance: 152x122 mm) | |
|  | - transparent lid - transparent lid; 4+2 M16x1.5 cable glands - plugs - transparent lid; 4+2 PVC end-fittings for sheath | CASTL CASTLPG9 CASTLGUA |
|  | - external keyboard - external keyboard; 4+2 M16x1.5 cable glands - plugs - external keyboard; 4+2 PVC end-fittings for sheath | CASTLTAST CASTLTASTPG9 CASTLTASTGUA |
|  | ATEX II 3GD (zone 2-22) version - external keyboard; 4+2 M16x1.5 cable glands - plugs | CASTLTASTATEX |